




- 28 meter (92 ft.) Vertical reach
- 115 /140 m<sup>3</sup>/hr concrete delivery rate
- 1268 psi (87.5 Bar) Concrete pressure
- 1566 psi (108 Bar) option available
- 4 Section Z - Fold Boom
- "X" Frame Outrigger / Pedestal
- Super Efficient Hydraulic System.
- Designed and made in Australia.
- 5" (125mm) Concrete Line
- 9"(230mm) Concrete cylinders opt.
- 8" X 7" S-tube standard.
- HYPERCHROME wear plate Standard
- Tungsten wear plate Option

#### PUMP SPECIFICATIONS

	115 M <sup>3</sup> /hr / 150cuYd/hr	140 M <sup>3</sup> /hr / 180cuYd/hr
Output:	115 M <sup>3</sup> /hr / 150cuYd/hr	140 M <sup>3</sup> /hr / 180cuYd/hr
Pressure:	87.5 bar / 1268 psi	108 bar / 1566 psi
Hard-Chromed Concrete Cylinders	Standard	Standard
Concrete Cylinder Diameter	200mm / 8.0"	200mm / 8.0"
Stroke Length	1800mm / 71"	2200mm / 88"
Maximum Strokes per minute	35	35
Hopper Capacity	650 L / 23 cu ft.	650 L / 23 cu ft.
Volume Control	Zero to Full	Zero to Full
Hydraulic System	Semi - Closed Loop	Semi - Closed Loop
Hydraulic System Pressure	350bar / 5075psi	350bar / 5075psi
Hydraulic Tank Capacity (Pump Sys)	378 L / 100 gal	378 L / 100 gal
Hydraulic Oil Flow	560L/min / 184 gal/min	560L/min / 184 gal/min
Hydraulic Drive Cylinders. Rod Dia.	70 mm / 2.75"	70 mm / 2.75"
Piston Diameter	101.6 mm / 4"	101.6 mm / 4"
Water Tank Capacity	650 L / 175 gal	650 L / 175 gal
Maximum Aggregate Size	63mm / 2.5"	63mm / 2.5"

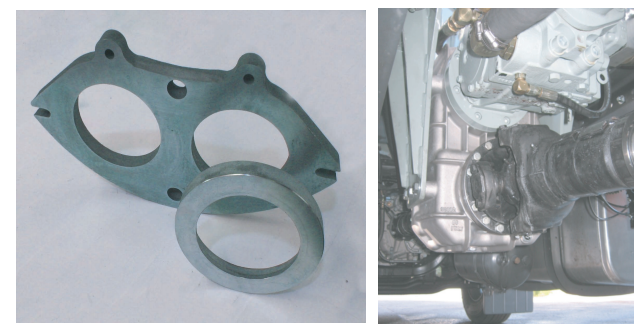

#### BOOM SPECIFICATIONS

Height & Reach			General Specification		
Vertical Reach	28.00m	92'0"	Pipeline Size (ID) Metric Ends	125 mm	5.0"
Horizontal Reach	23.60 m	107'3"	With Couplings	140 mm	5.5"
Reach From Front of Truck	29.39 m	96'5"	Rotation	365°	365°
Reach Depth	24.92 m	81'9"	End Hose : Length (Heavy-duty)	4.00 m	13'0"
Unfolding Height	8.48 m	27'9"	Diameter	125 mm	5.0"
<b>4-Section Boom</b>			Outrigger Spread L-R-Front	5.68 m	18'6"
1st Section Articulation	98°	98°	Outrigger Spread L-R-Rear	5.00 m	16'4"
2nd Section Articulation	180°	180°			
3rd Section Articulation	260°	260°			
4th Section Articulation	270	270			
1st Section Length	6.96 m	22'10"			
2nd Section Length	6.05 m	19'10"			
3rd Section Length	5.59 m	18'4"			
4th Section Length	5.00 m	16'4"			